


HYPERTECH DYNAMOMETER TEST RESULTS

2010-2015 Chevrolet Camaro SS (Automatic Transmission)
6.2L V8 Engine (L99)

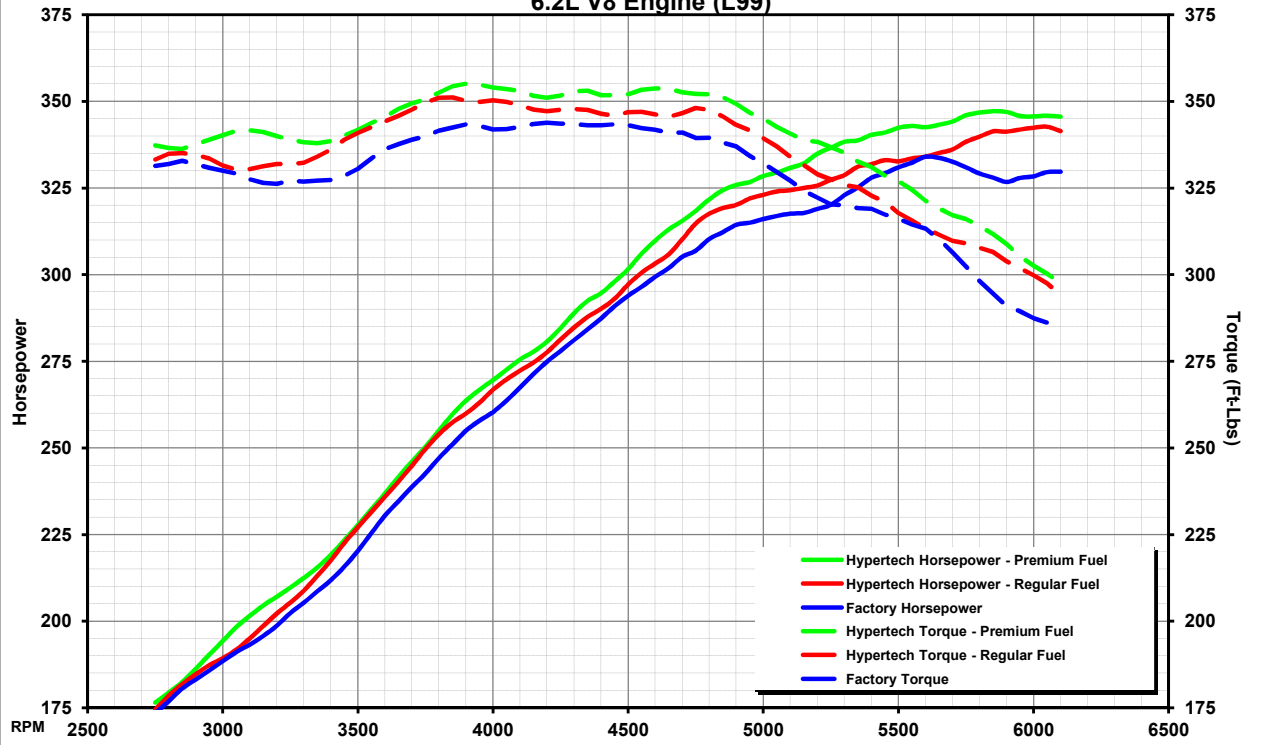

Tuning	Horsepower		Torque	
	Maximum	Gain	Maximum	Gain
Hypertech Tuning Premium Fuel	347 HP @ 5850 RPM	+20 HP @ 5900 RPM	355 Ft-Lbs @ 3900 RPM	+18 Ft-Lbs @ 5900 RPM
Hypertech Tuning Regular Fuel	343 HP @ 6050 RPM	+14 HP @ 5900 RPM	351 Ft-Lbs @ 3850 RPM	+13 Ft-Lbs @ 5900 RPM
Factory Stock Tuning	334 HP @ 5600 RPM	—	344 Ft-Lbs @ 4200 RPM	—

RPM	Horsepower				
	Factory HP	Hypertech Regular Fuel HP	(Gain)	Hypertech Premium Fuel HP	(Gain)
2750	174	174	(+0)	177	(+3)
3000	188	189	(+1)	194	(+6)
3250	202	205	(+3)	210	(+8)
3500	220	227	(+7)	228	(+8)
3750	243	250	(+7)	250	(+7)
3850	251	257	(+6)	260	(+9)
3900	255	260	(+5)	264	(+9)
3950	258	263	(+5)	267	(+9)
4000	260	267	(+7)	270	(+10)
4200	275	278	(+3)	281	(+6)
4250	278	281	(+3)	285	(+7)
4500	294	297	(+3)	302	(+8)
4750	307	315	(+8)	318	(+11)
5000	316	323	(+7)	328	(+12)
5250	320	327	(+7)	337	(+17)
5500	331	333	(+2)	342	(+11)
5600	334	334	(+0)	343	(+9)
5750	331	338	(+7)	346	(+15)
5850	328	341	(+13)	347	(+19)
5900	327	341	(+14)	347	(+20)
5950	328	342	(+14)	346	(+18)
6050	330	343	(+13)	346	(+16)
6100	330	341	(+11)	346	(+16)

RPM	Torque				
	Factory Torque	Hypertech Regular Fuel Torque	(Gain)	Hypertech Premium Fuel Torque	(Gain)
2750	331	333	(+2)	337	(+6)
3000	330	331	(+1)	340	(+10)
3250	327	332	(+5)	339	(+12)
3500	331	341	(+10)	342	(+11)
3750	340	350	(+10)	351	(+11)
3850	342	351	(+9)	354	(+12)
3900	343	350	(+7)	355	(+12)
3950	343	350	(+7)	355	(+12)
4000	342	350	(+8)	354	(+12)
4200	344	347	(+3)	351	(+7)
4250	344	348	(+4)	352	(+8)
4500	343	347	(+4)	352	(+9)
4750	339	348	(+9)	352	(+13)
5000	332	339	(+7)	345	(+13)
5250	320	328	(+8)	337	(+17)
5500	316	318	(+2)	327	(+11)
5600	313	313	(+0)	321	(+8)
5750	302	309	(+7)	316	(+14)
5850	295	307	(+12)	312	(+17)
5900	291	304	(+13)	309	(+18)
5950	289	302	(+13)	305	(+16)
6050	286	298	(+12)	300	(+14)
6100	284	294	(+10)	298	(+14)

Tuning Features

- Contains Two Performance Tunes for either Regular or Premium Fuel
- Speedometer and Odometer Correction for Tire Sizes for 24"-54"
- Speedometer and Odometer Correction for Rear Axle Gear Ratios 2.56:1-5.13:1
- Adjustable Transmission Shift Points
- Adjustable Transmission Shift Firmness *
- Reads, Displays, and Clears Diagnostic Trouble Codes (DTC's)
- Adjustable Top Speed Limiter to Match Speed Rated Tires
- Adjustable Engine RPM Rev Limiter
- Selectable 0-60MPH Electronic Throttle Restriction (Factory, or Removed)
- Disable Active Fuel Management System: Yes or No

* 2012-2014 Models Only



3215 Appling Rd., Bartlett, TN 38133 www.Hypertech.com
(901) 385-1888 © Hypertech, Inc. 2015

Vehicle Tested: 2010 Camaro SS
Engine: 6.2L V8 (L99)
Transmission: 6-Speed Auto
Gear Ratio: STOCK
Tire Size: STOCK
Test Date: 8/28/2009

