


# HYPERTECH DYNAMOMETER TEST RESULTS

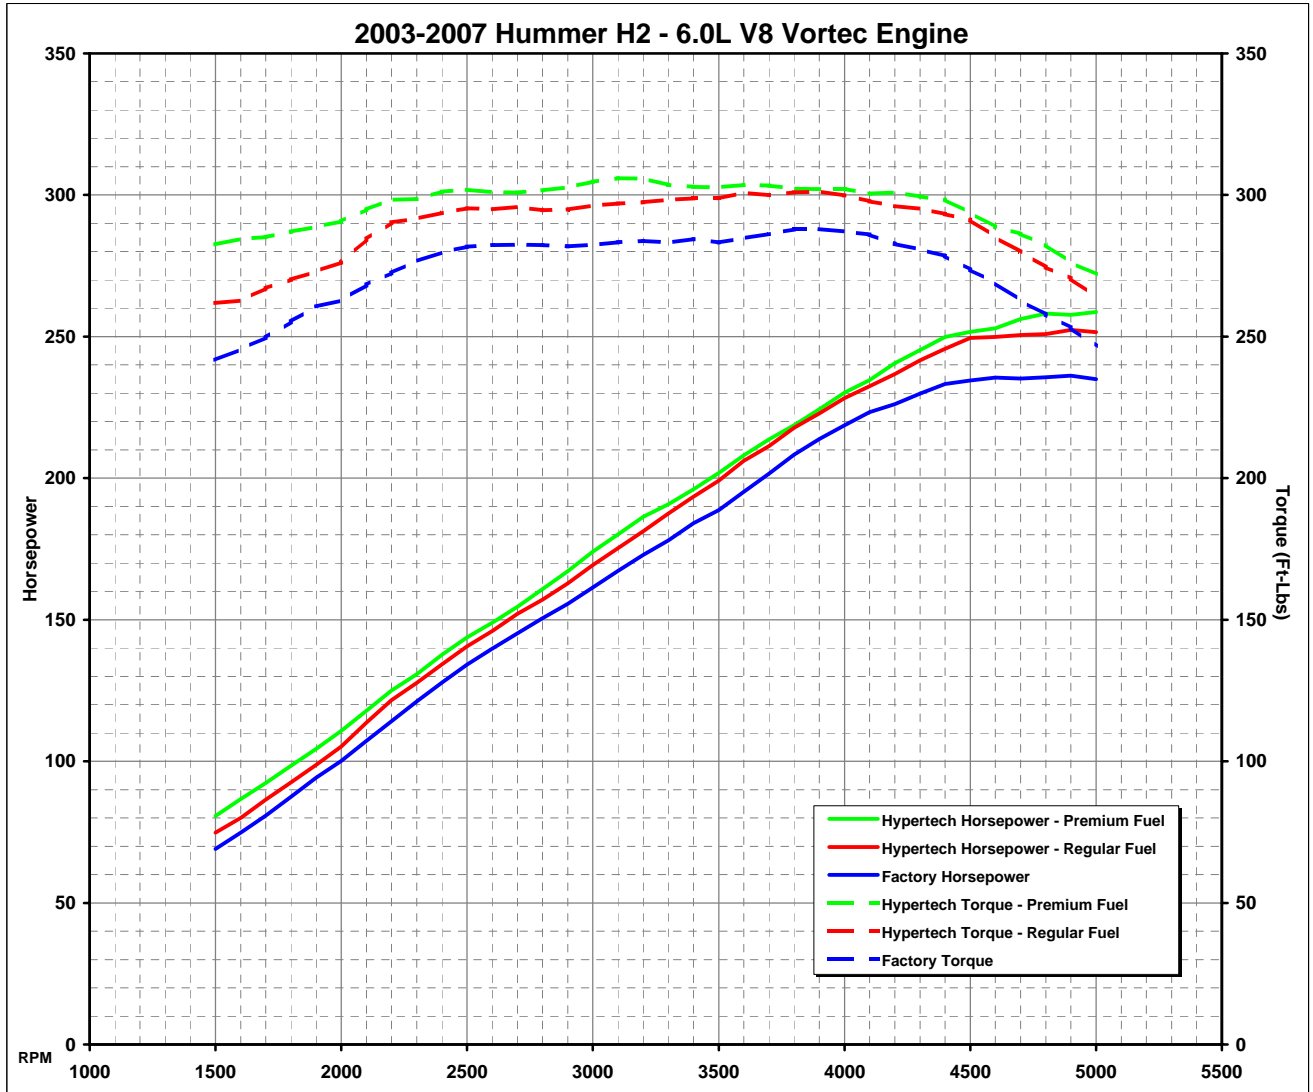

Tuning	Horsepower		Torque	
	Maximum	Gain	Maximum	Gain
Hypertech Tuning Premium Fuel	259 HP @ 5000 RPM	+24 HP @ 5000 RPM	306 Ft-Lbs @ 3100 RPM	+41 Ft-Lbs @ 1500 RPM
Hypertech Tuning Regular Fuel	252 HP @ 4900 RPM	+17 HP @ 5000 RPM	301 Ft-Lbs @ 3900 RPM	+20 Ft-Lbs @ 1500 RPM
Factory Stock Tuning	236 HP @ 4900 RPM	—	288 Ft-Lbs @ 3900 RPM	—

RPM	Horsepower		
	Factory HP	Hypertech Regular Fuel HP (Gain)	Hypertech Premium Fuel HP (Gain)
1500	69	75 (+6)	81 (+12)
2000	100	105 (+5)	111 (+11)
2500	134	141 (+7)	144 (+10)
3000	161	169 (+8)	174 (+13)
3100	167	175 (+8)	180 (+13)
3500	189	199 (+10)	202 (+13)
3900	214	223 (+9)	224 (+10)
4000	219	228 (+9)	230 (+11)
4500	234	250 (+16)	252 (+18)
4900	236	252 (+16)	258 (+22)
5000	235	252 (+17)	259 (+24)

RPM	Torque		
	Factory Torque	Hypertech Regular Fuel Torque (Gain)	Hypertech Premium Fuel Torque (Gain)
1500	242	262 (+20)	283 (+41)
2000	263	276 (+13)	291 (+28)
2500	282	295 (+13)	302 (+20)
3000	282	296 (+14)	305 (+23)
3100	283	297 (+14)	306 (+23)
3500	283	299 (+16)	303 (+20)
3900	288	301 (+13)	302 (+14)
4000	287	300 (+13)	302 (+15)
4500	274	291 (+17)	294 (+20)
4900	253	271 (+18)	276 (+23)
5000	247	264 (+17)	272 (+25)

### Tuning Features

- Contains Two Performance Tunes for Regular and Premium Fuel
- Speedometer and Odometer Correction for Tire Sizes for 24"-54"
- Speedometer and Odometer Correction for Rear Axle Gear Ratios 2.73:1-4.56:1
- Adjustable Transmission Shift Points and Shift Firmness
- Reads, Displays, and Clears Diagnostic Trouble Codes (DTC's)
- Adjustable Top Speed Limiter to Match Speed Rated Tires
- Adjustable Engine RPM Rev Limiter
- Adjustable Cooling Fan On/Off Temperature Settings (if applicable)



3215 Appling Rd., Bartlett, TN 38133 [www.Hypertech.com](http://www.Hypertech.com)  
 (901) 382-8888 © Hypertech, Inc. 2007

Vehicle Tested: 2004 Hummer H2  
 Engine: 6.0L V8  
 Transmission: 4-Speed Auto  
 Gear Ratio: Stock  
 Tire Size: Stock  
 Test Date: 8/22/2003

Hypertech Part Number:  
 Max Energy

**32500**