

Hypertech Inline Speedometer Calibrator Module Installation Instructions 730113 Toyota Highlander and Highlander HV

Tools Needed: #1 Phillips screwdriver, and (Optional) Trim Removal Tools & Latex Gloves

Be advised: These instructions may not include specifics for all vehicle configurations.

1. Program the Speedometer Calibrator Module
2. Set Parking brake and adjust steering wheel to various settings to facilitate removing the Instrument panel.
3. Remove the Instrument Panel Bezel
 - a. Using your fingers and starting on once side, carefully pull outward to separate and remove the bezel. (Gloves come in handy, so you don't leave marks on the bezel)



4. Remove the Instrument Cluster
 - a. Using a Phillips Screwdriver, remove the (4) Instrument Panel Cluster retaining screws



- b. Tilt the cluster outward so you can get to the electrical connector.



- c. Press the lock release and pull straight out on the connector. Sometimes they are tough, but do not rock the connector, apply outward pressure to disconnect.




5. Install the Inline Module

- a. Using the supplied cable, connect the small black connector (C3) to the VSS inline module.



- b. Connect either end of the supplied cable, which has two white connectors, to (P1) of the green interface circuit board.

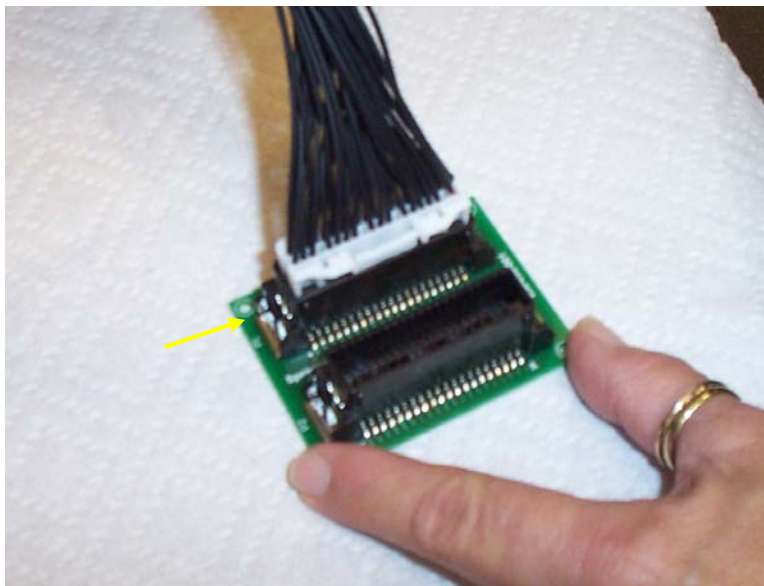

- c. Connect the vehicle's Instrument Panel connector to (P2) of the green interface circuit board.



- d. Carefully stow away the inline module and the green interface board.
- e. Both pieces can be tied to a brace, cable or support, using tie wraps.



- f. Connect the other end of the supplied cable to the IPC.
6. Reverse the process of this document to properly re-install the Instrument Panel components.