


HYPERTECH DYNAMOMETER TEST RESULTS

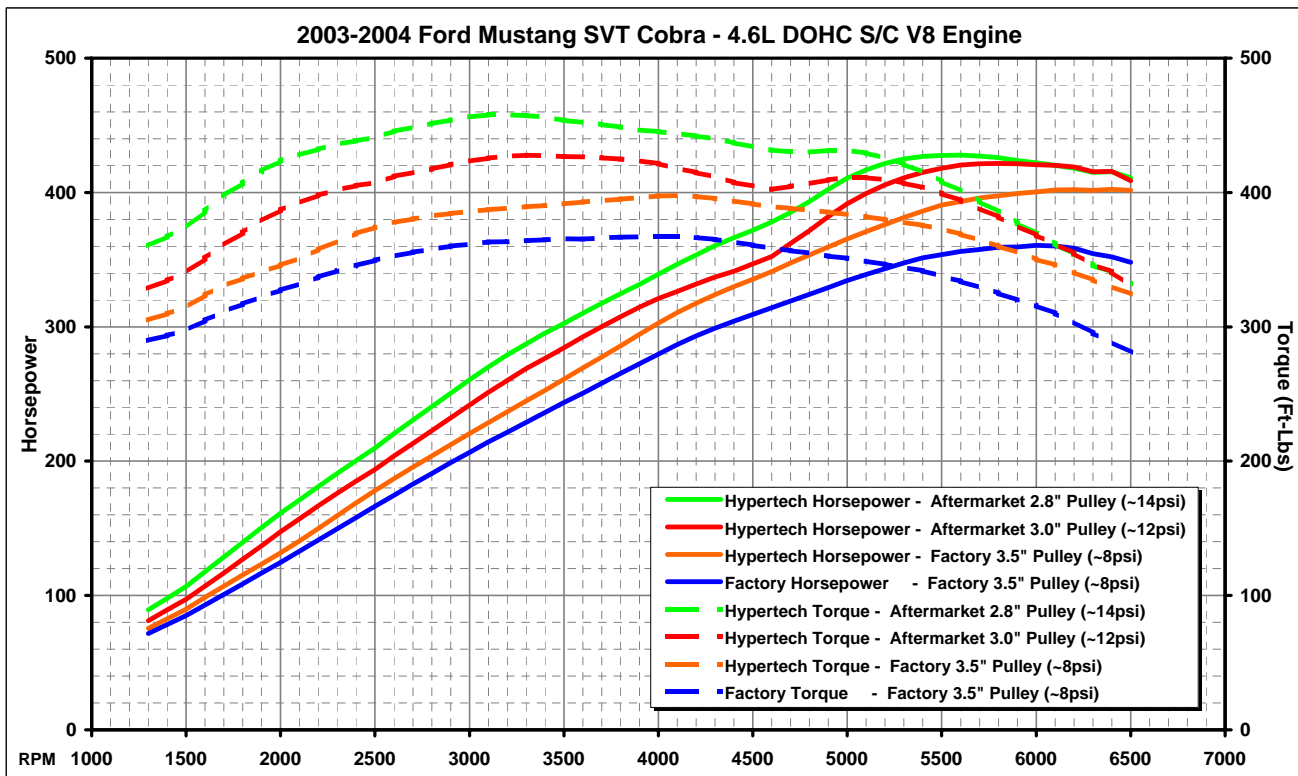

Tuning	Horsepower		Torque	
	Maximum	Gain	Maximum	Gain
Hypertech Tuning 2.8" Pulley	428 HP @ 5600 RPM	+79 HP @ 5200 RPM	458 Ft-Lbs @ 3200 RPM	+97 Ft-Lbs @ 2000 RPM
Hypertech Tuning 3.0" Pulley	422 HP @ 5800 RPM	+64 HP @ 5500 RPM	428 Ft-Lbs @ 3300 RPM	+64 Ft-Lbs @ 3300 RPM
Hypertech Tuning Stock Pulley	402 HP @ 6400 RPM	+54 HP @ 6500 RPM	398 Ft-Lbs @ 4100 RPM	+43 Ft-Lbs @ 6500 RPM
Factory Tuning Stock Pulley	361 HP @ 6000 RPM	—	367 Ft-Lbs @ 4100 RPM	—

RPM	Horsepower			
	Factory HP	Hypertech Stock Pulley HP (Gain)	Hypertech 3.0" Pulley HP (Gain)	Hypertech 2.8" Pulley HP (Gain)
1300	72	76 (+4)	81 (+9)	89 (+17)
1500	85	90 (+5)	97 (+12)	107 (+22)
2000	125	132 (+7)	147 (+22)	161 (+36)
2500	166	178 (+12)	194 (+28)	210 (+44)
3000	207	221 (+14)	242 (+35)	261 (+54)
3200	222	237 (+15)	260 (+38)	279 (+57)
3300	229	245 (+16)	269 (+40)	287 (+58)
3500	244	261 (+17)	284 (+40)	302 (+58)
4000	280	303 (+23)	321 (+41)	339 (+59)
4100	287	311 (+24)	326 (+39)	347 (+60)
4500	309	335 (+26)	347 (+38)	372 (+63)
5000	334	365 (+31)	392 (+58)	411 (+77)
5200	343	376 (+33)	406 (+63)	422 (+79)
5500	354	391 (+37)	418 (+64)	428 (+74)
5600	356	393 (+37)	420 (+64)	428 (+72)
5800	359	398 (+39)	422 (+63)	426 (+67)
6000	361	400 (+39)	421 (+60)	422 (+61)
6400	352	402 (+50)	416 (+64)	416 (+64)
6500	348	402 (+54)	409 (+61)	411 (+63)

RPM	Torque			
	Factory Torque	Hypertech Stock Pulley Torque (Gain)	Hypertech 3.0" Pulley Torque (Gain)	Hypertech 2.8" Pulley Torque (Gain)
1300	290	305 (+15)	329 (+39)	360 (+70)
1500	297	314 (+17)	340 (+43)	373 (+76)
2000	327	346 (+19)	387 (+60)	424 (+97)
2500	350	374 (+24)	408 (+58)	441 (+91)
3000	362	386 (+24)	423 (+61)	456 (+94)
3200	364	389 (+25)	427 (+63)	458 (+94)
3300	364	390 (+26)	428 (+64)	457 (+93)
3500	366	392 (+26)	427 (+61)	454 (+88)
4000	367	397 (+30)	422 (+55)	445 (+78)
4100	367	398 (+31)	418 (+51)	444 (+77)
4500	361	392 (+31)	405 (+44)	434 (+73)
5000	351	384 (+33)	411 (+60)	431 (+80)
5200	347	380 (+33)	410 (+63)	426 (+79)
5500	338	373 (+35)	399 (+61)	408 (+70)
5600	334	369 (+35)	394 (+60)	401 (+67)
5800	325	360 (+35)	382 (+57)	386 (+61)
6000	316	351 (+35)	368 (+52)	369 (+53)
6400	289	330 (+41)	341 (+52)	341 (+52)
6500	281	324 (+43)	330 (+49)	332 (+51)

Tuning Features

- Premium Fuel Power Tuning for three Supercharger pulley sizes: 3.5" Factory Pulley, 3.0" Aftermarket Pulley, 2.8" Aftermarket Pulley
- Speedometer and Odometer Correction for Tire Sizes for 23"-30"
- Speedometer and Odometer Correction for Rear Axle Gear Ratios 2.73:1-4.56:1
- Adjustable Cooling Fan On/Off Temperature Settings
- Reads, Displays, and Clears Diagnostic Trouble Codes (DTC's)
- Adjustable Top Speed Limiter to Match Speed Rated Tires
- Adjustable Engine RPM Rev Limiter



Vehicle Tested: 2003 Ford SVT Cobra
Engine: 4.6L DOHC Supercharged V8
Transmission: T-56 6-Speed
Gear Ratio: 3.55:1
Tire Size: 275/40/17
Test Date: 1/15/2004

Hypertech Part Number:
<i>Max Energy</i>
42500